



2.4 GHz 8.5 dBi Omnidirectional Wireless LAN Antenna With Magnetic Base

Model: HG2409MGU

Applications and Features

- Applications:**
- 2.4 GHz ISM Band
 - 2.36 GHz CDMA Band
 - IEEE 802.11b and 802.11g Wireless LAN
 - Bluetooth®
 - Public Wireless Hotspot
 - WiFi
 - Multipoint and Mobile Applications

- Features:**
- Superior performance
 - Compact, lightweight design
 - Durable UV-stable fiberglass radome
 - Vented end cap and drain holes in base
 - All weather operation
 - Magnetic base with 12 ft. coax lead
 - N-Male or N-Female connectors
 - Can be installed in up or down positions
 - Optional antenna mounts available




Description

High Performance

The HyperGain® HG2409MGU is a high performance omnidirectional WiFi antenna designed for the 2.4 GHz ISM band and 2.36 GHz CDMA band. This compact and lightweight antenna is ideally suited for IEEE 802.11b and 802.11g wireless LANs, public wireless hotspots, Bluetooth® and other multipoint and mobile applications where high gain and wide coverage is desired. This antenna includes a magnetic base suitable for tabletop or mobile use, and 12 feet of high quality RG58 cable terminated with an N-Female or N-Male connector (special order connectors are available).

All Weather Operation

Constructed for all weather operation, the HG2409MGU features sealed collinear brass elements inside a durable UV-stable machine gray fiberglass radome. A vented end cap and drain holes in the base help prevent moisture build-up inside the antenna. These features allow the HG2409MGU to be mounted in up or down positions.

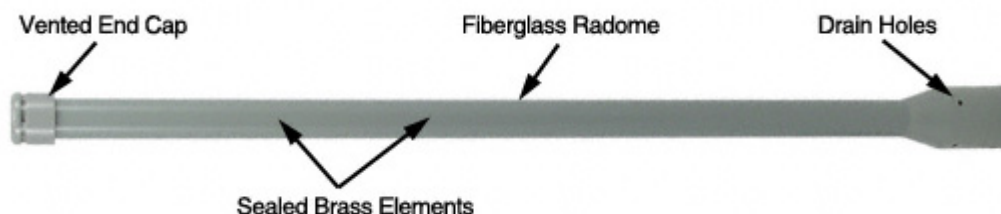



Model: HG2409MGU

Specifications
Electrical Specifications

Frequency	2360-2500 MHz
Gain	8.5 dBi
Impedance	50 Ohm
VSWR	< 2.0:1 avg.
Maximum Input Power	100 W

Mechanical Specifications

Polarization	Vertical
Vertical Beam Width	15°
Horizontal Beam Width	360°
Weight	1.5 lbs. (.68 kg)
Length	21 in. (533 mm)
Base Diameter	2.6 in. (66.8 mm)
Radome Material	Gray Fiberglass
Wind Survival	>150 MPH
Operating Temperature	-40° C to to 85° C (-40° F to 185° F)
Mounting	Magnetic Base
Antenna Connector	Integral N-Male

Antenna Gain Pattern
